

# Emergency Aid Camp Infrastructure



## Quick Tanks


The Quick tank is designed for fast, simple erection with the robust construction necessary to withstand heavy, long term use. Available in a wide range of sizes, they are ideal for any situation where instant water storage is required.

- 3,000 to 40,000 litre capacity
- Suitable for ALL climates
- Delivered complete in 1 x ISPM15 heat treated plywood case suitable for export
- Can be erected in 15 minutes by 2 people on any firm, level ground
- A full range of spares and accessories are available from stock



### Tank Body

The common feature of the Quick tank is the steel framework. Each side of the tank is 1.75m wide by 1.15m high, giving a liquid depth of 1.00m. The XL range tanks are 1.35m high, giving a liquid depth of 1.20m

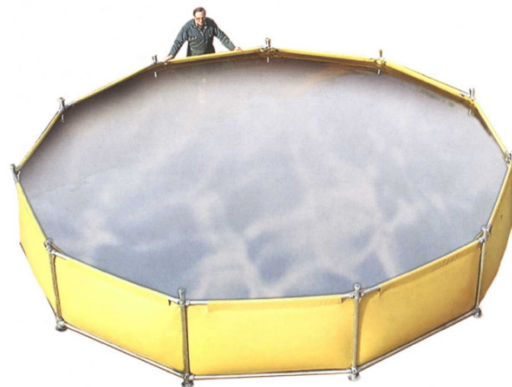

### Frame

32mm diameter galvanised steel water pipe with cast aluminium fittings. Each fitting is locked in position by a hexagon socket screw tightened by an Allen key (provided).

### Tank Outlet

All tanks are fitted with a 2" BSP Anodised aluminium outlet with cap positioned at the bottom of the bag.

Tank Reference	Capacity (litres)	Number of Sides	Ground Ø Required (m)
Q4	3,000	4	2.5
Q5	5,200	5	3.0
Q6	8,000	6	3.5
Q7	11,100	7	4.1
Q8	14,700	8	4.6
Q9	18,900	9	5.2
Q10	23,200	10	5.7
Q11	28,600	11	6.3
Q12	34,200	12	6.8
Q12XL	40,000	12	6.8



### Butyl Products Ltd.

Lingfield House, 11 Radford Crescent, Billericay, Essex,  
CM12 0DW, United Kingdom. T: +44 (0) 1277 653 281  
F: +44 (0) 1277 657 921 E: [enquiries@butylproducts.co.uk](mailto:enquiries@butylproducts.co.uk)  
W: [butylproducts.co.uk](http://butylproducts.co.uk)

