
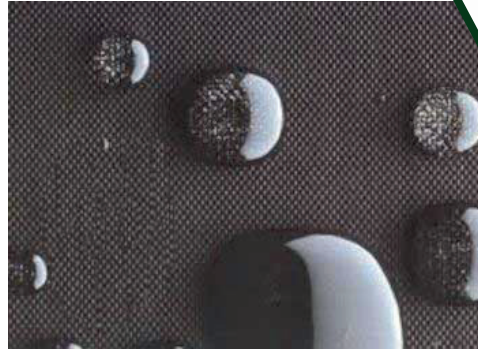


Specialist Geomembranes

Technical Data Sheet

Landflex EP75 - 0.75mm EPDM

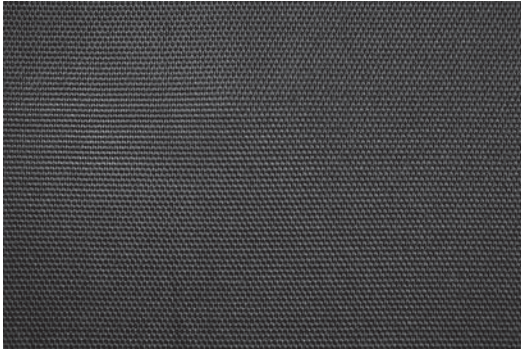

The information herein is based upon data obtained by the manufacturer and is considered accurate. However, no warranty is expressed or implied regarding the accuracy of this data. This information is furnished upon the condition that the person receiving it shall evaluate its suitability for the specific application.

Material Properties	Unit	Test Method	Requirements	Typical Values
Hardness	°IRH	ISO 48	65 ±5	65
Tensile strength	MPa	ISO 37	Min. 9.0	9.8
Elongation at break	%	ISO 37	Min. 300	530
Tear strength	kN/m	ISO 34	Min. 30	43
Foldability at low temperature	°C	EN 495-5	Max. -40	-60
Water vapour transmission properties	μ	EN 1931	300000	± 20%
Colour	Black			
Roll width	m	1.70		
Roll length	m	30.00 (51m ² per roll)		
Material thickness	mm	0.75		



Example use: Pond linings



Example use: Waterproof green roof linings



Butyl Products Group Ltd.

Lingfield House, 11 Radford Crescent, Billericay, Essex, CM12 0DW, United Kingdom.

T: +44 (0) 1277 653 281 F: +44 (0) 1277 657 921

E: enquiries@butylproducts.co.uk W: butylproducts.co.uk

E: enquiries@butek-landline.co.uk W: butek-landline.co.uk

Butek Landline

Containment Solutions

Spec. 9 Rev. B