

---

# VAR 3-100

---

Diesel - Qmax 70 m<sup>3</sup>/h (310 USgpm) - Hmax 22 m (72 ft)

---



---

## VAR - Self-priming centrifugal pumps

---

These self-priming centrifugal pumps are for applications where the main feature is the difficulty in priming. Even with suction heights of several meters the machine quickly evacuates the air from the suction pipe and starts pumping. Additionally, thanks to the semi-open impeller, the VAR range is also suitable for pumping liquids with solids in suspension.

---

## Applications

---

Both Atlas Copco and Varisco have decades of experience in designing and producing pumps. We have put those years of expertise into providing a solutions portfolio that works across multiple applications. The VAR range is packed with features that not only meet, but exceed the needs of the market. We are focused on an efficient, extremely versatile pump that is suitable for many industries, including construction, general dewatering and emergency applications, such as flood clean up.

---

## Benefits

---

### Rapid self-priming

Without foot valve up to a height of 7.5 m (24.5 ft)

### High resistance

To abrasive liquids and turbid sandy waters

### Semi-open impeller

Solids handling up to 25 mm (1")

### Easy maintenance

Removable front cover for direct access to the impeller

# VAR 3-100

## Performance curves

Test according to UNI EN ISO 9906 standard - level 2

Test liquid: clean water, density 1,000 kg/m<sup>3</sup>


Spherical solids handling: D.25 mm (1")

Priming time: 18 s from 1,5 m (4.9 ft)

Max absorbed power: 3,4 kW - 4.6 HP (3.600 rpm)



Recommended operating range

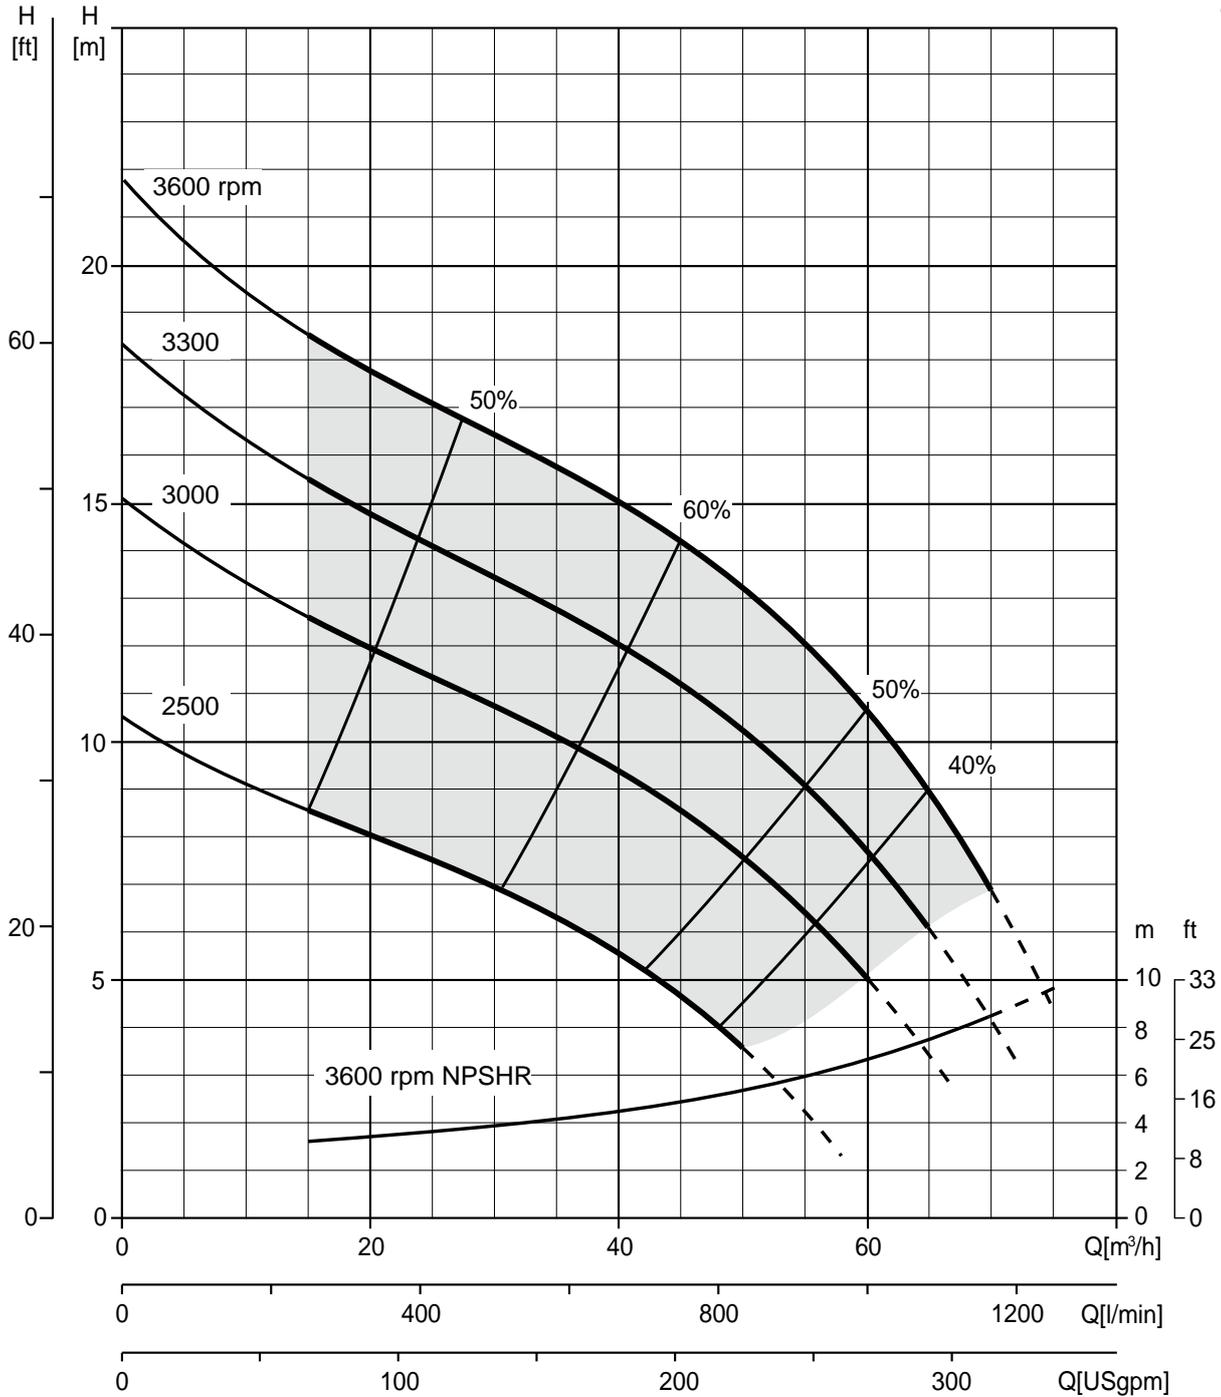

# VAR 3-100

## Technical data

### Pump

<b>Model</b>	VAR 3-100	
<b>Qmax</b>	70 m <sup>3</sup> /h - 1.170 l/min (300 USgpm)	
<b>Hmax</b>	22 m (72 ft)	
<b>Q max eff.</b>	45 m <sup>3</sup> /h - 750 l/min (200 USgpm)	
<b>Eff. max</b>	60 %	
<b>Suction port</b>	Threaded - 3" BSP	
<b>Delivery port</b>	Threaded - 3" BSP	
<b>Impeller type</b>	Semi-Open, 3 vane	
<b>Solids handling</b>	25 mm (1.0 ")	
<b>Material</b>	<b>G30</b>	<b>G10</b>
<b>Casing</b>	EN-GJL-200 cast iron	EN-GJL-200 cast iron
<b>Impeller</b>	EN-GJL-200 cast iron	EN-GJL-200 cast iron
<b>Shaft</b>	C45 steel	C45 steel
<b>Mechanical seal</b>	Graphite / Silicon carbide	Silicon carbide / Silicon carbide
<b>Elastomers</b>	NBR	NBR

### Engines

<b>Make</b>	Kohler				
<b>Model</b>	15LD350 (LD56)				
<b>Type</b>	Diesel direct injection, aspirated				
<b>Displacement</b>	349 cm <sup>3</sup> (21 in <sup>3</sup> )				
<b>No. cylinders</b>	1				
<b>Cooling</b>	Air				
<b>Rpm type</b>	Variable				
<b>Standard speed</b>	3.600 rpm				
<b>EU emissions</b>	N/Em				
<b>US emissions</b>	EPA Tier I				
<b>Starting</b>	Recoil				
<b>Oil change interval</b>	250 h				
<b>Market</b>	UE				
<b>Speed [rpm]</b>	<b>2000</b>	<b>2500</b>	<b>3000</b>	<b>3300</b>	<b>3600</b>
<b>Consumption [l/h]</b>	1	1,2	1,3	1,3	1,5
<b>Power [kW]</b>	2,9	3,7	4,2	4,5	4,7
<b>Power [HP]</b>	3.9	5	5.6	6	6.3

# VAR 3-100

## Arrangements

Technical data	
Material	S275JR EN 10025-2 carbon steel
Coatings	Bicomponent, average thickness of 80 µm
Color	Yellow and grey Atlas Copco (standard)
Features	Galvanised steel frame: chassis, lifting bar, adjustable handle, support foot. Tractor tires.
Tank	4,3 l (1.1 USG)

### VAR 3-100 D TROLLEY - R



Dimensions	610 x 945 x 980 mm 24 x 37 x 39 "
H suction port	0,42 m (1.4 ft)
Weight (LD56)	63 kg (140 lb)